


# 3 Section EN14975 Lyte Timber Easiloft

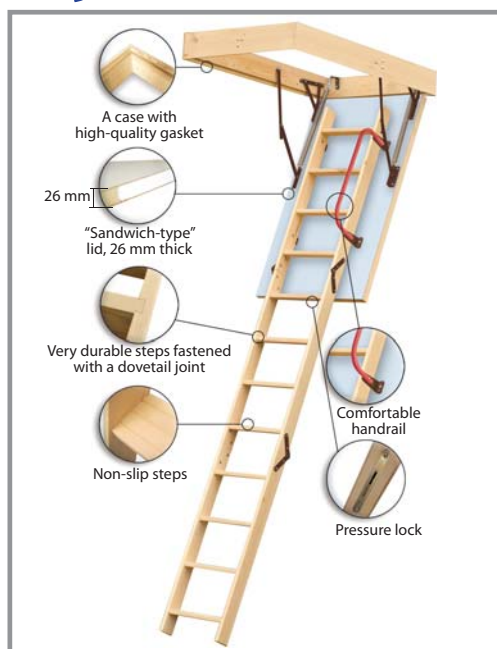

- ✓ Continuous seal around trap door reduces heat loss
- ✓ White 26mm thick insulated trapdoor
- ✓ Dovetail joints for added durability
- ✓ Fully assembled and easy to install
- ✓ Slip resistant treads


For more information  
and measurements  
please call or email **NOW:**

**Tel: 01792 796666**

Email: [sales@lyteladders.co.uk](mailto:sales@lyteladders.co.uk)



Ladder Specification		Case	
Ladder Width	370mm	Width	550mm
Inside Ladder Width	330mm	Length	1130mm
Tread Depth	80mm	Height	130mm
Tread Thickness	20mm	Hatch Thickness	26mm
Max Floor to Floor	2800mm		
Weight	26.6kg		

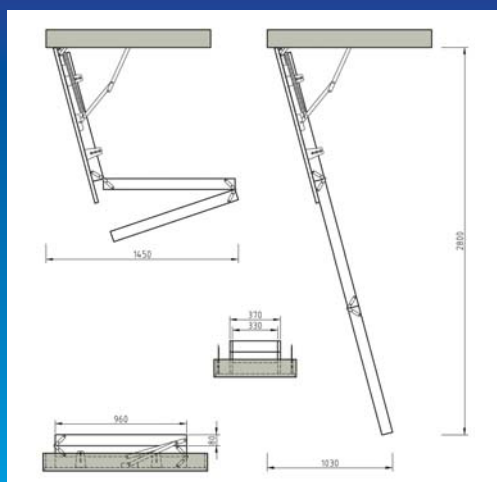

**150KG MAX  
PERMISSIBLE LOAD**

**LYTE**  
LADDERS • TOWERS

[www.lyteladders.co.uk](http://www.lyteladders.co.uk)

# 4 Section EN14975 Lyte Timber Easiloft




- ✓ Continuous seal around trap door reduces heat loss
- ✓ White 26mm thick insulated trapdoor
- ✓ Dovetail joints for added durability
- ✓ Fully assembled and easy to install
- ✓ Slip resistant treads

For more information  
and measurements  
please call or email **NOW:**

**Tel: 01792 796666**

Email: [sales@lyteladders.co.uk](mailto:sales@lyteladders.co.uk)

Ladder Specification		Case	
Ladder Width	370mm	Width	550mm
Inside Ladder Width	330mm	Length	900mm
Tread Depth	80mm	Height	210mm
Tread Thickness	20mm	Hatch Thickness	26mm
Max Floor to Floor	2800mm		
Weight	26kg		

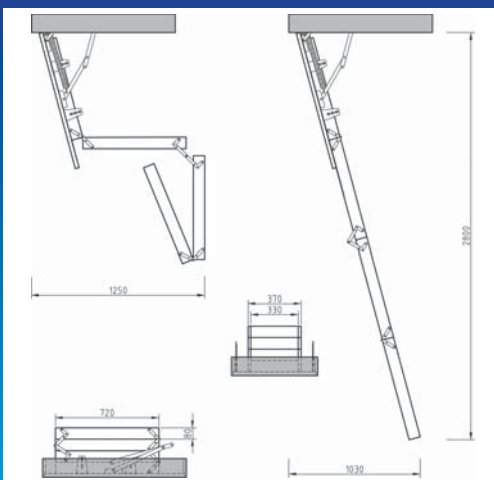

**150KG MAX  
PERMISSIBLE LOAD**

**LYTE**  
LADDERS • TOWERS

[www.lyteladders.co.uk](http://www.lyteladders.co.uk)